

xl

click comfort


plank: 1830 × 228 mm – box: 6 planks (=2,503 m²) – Pallet: 56 boxes (=140,19m²)

product specifications.

product specifications.		pro xl click comfort plank
Total Thickness	EN ISO 24346	4,5 mm + 1 mm
Pad (IXPE)		1 mm
Wear Layer	EN ISO 24340	0,55 mm
Total Weight	EN ISO 23997	9,3 kg/m ²
Usage classification	EN ISO 10874	23/33/42

test results.

test results.		suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m ²
Underfloor heating	EN ISO 12524	
Castor chair	EN ISO 4918	pass
Fire resistance	EN ISO 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	<0,1mm
Slip resistance	DIN 51130	R10
	EN ISO 13893	class DS
Sound reduction: impact sound	EN ISO 717-2	20 dB
Reflected walking sound	EPLF draft 021029-3-2004	37 SONE (52% sound reduction)
Dimensional stability	EN ISO 23999	< 0,15 %
Residential warranty		25 y
Commercial warranty		10 y
Formaldehyde	EN ISO 717-1	E1
Lock Strength	EN ISO 10582	> 5 kN/m




SPIRIT XL 55
CLICK COMFORT

XL

spirit.

spirit.
XL click comfort

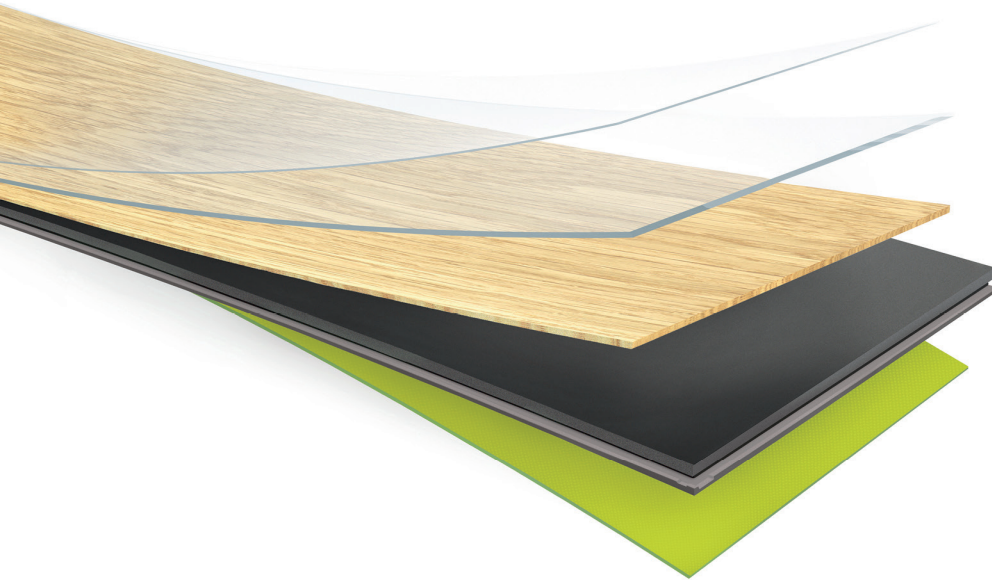

- 1 Protective PU lacquer
- 2 Wear layer 0,55 mm
- 3 Decorative printfilm
- 4 Rigid board
- 5 Integrated underfloor (1 mm)

Total thickness: 4.5+1 mm